



ELECTRICAL TEST INSTRUMENTS

ATRT-03 S2[®]

AUTOMATIC, 3-PHASE TRANSFORMER TURNS RATIO TESTER



ATRT-03 S2

Automatic, 3-Phase Transformer Turns Ratio Tester



PRODUCT OVERVIEW

The ATRT-03 S2 can be used as a standalone unit or can be computer-controlled. It can be operated locally using its alpha-numeric keypad and rotary switch. Information is displayed on a back-lit LCD screen (128 x 64 pixels) that is viewable in both bright sunlight and low-light levels. Test reports can be printed in the field on the unit's built-in 4.5-inch wide thermal printer. The ATRT-03 S2 is capable of storing up to 112 test records and 128 test plans in Flash EEPROM memory. Test records or test plans can be stored or transferred to and from a PC via the available interfaces (RS-232C port, USB port, USB Flash drive port).

Outstanding Features

- Ratio range: 0.8 ~ 15,000 : 1
- Capable of detecting 130 different 3-phase transformer types defined by ANSI, IEC, and Australian standards
- 3 test voltages: 8Vac, 40Vac, and 100Vac
- Phase angle and excitation current measurement
- RS-232C and USB PC interfaces
- Optional 4.5" wide thermal printer

Ordering Information

Part No.	Description
9003-UC	ATRT-03 S2, cables, and PC software
9003-SC	ATRT-03 S2 shipping case
9003-PR	ATRT-03 S2 thermal printer option
TP4-CS	TP4 thermal printer paper (24 rolls)

The ATRT-03 S2 is Vanguard's third generation, microprocessor-based, automatic, three phase, transformer turns-ratio tester. This lightweight and rugged portable unit is designed for transformer testing at utility power substations.

The ATRT-03S2 determines the transformer turns-ratio using the IEEE C57.12.90 measurement method. The ATRT-03 S2 outputs an excitation test voltage to the transformer's primary windings. The induced secondary voltage is sensed and the transformer turns-ratio is calculated. The ATRT-03 S2 can measure turns-ratio from 0.8 to 15,000. The transformer turns-ratio, excitation current, and phase-angle readings are displayed on the large back lit LCD. The built-in transformer type detection feature allows the ATRT-03 S2 to detect and test 130 transformer types defined by ANSI, CEI/IEC, and Australian standards.

Transformer Test Voltages

To prevent an accidental wrong test-lead hook-up (e.g., when the operator reverses H and X leads), the ATRT-03 S2 outputs a low-level test voltage to verify the hook-up condition before applying the full test voltage to the transformer. Three test voltages (8 Vac, 40 Vac, 100 Vac) allow the ATRT-03 S2 to test CT's and PT's, as well as power transformers.

Auto-Detect Transformer Configuration

The ATRT-03 S2 can automatically detect 130 specific vector groups for different transformer types defined by ANSI, CEI/IEC, and Australian standards.


Internal Test Record Storage

Up to 112 test records can be stored in the ATRT-03 S2's Flash EEPROM memory. Each test record may contain up to 99 turns-ratio, excitation current, phase angle and nameplate voltage readings. Test records can be recalled locally or transferred to a PC via the available interfaces (RS-232C port, USB port, USB Flash drive port).

Power Sources

The ATRT-03 S2 can be powered from a single-phase 100-240 Vac 50/60 Hz power source. A built in safety ground detection circuit can detect and display a ground fault problem with the AC input source.

ATRT-03 S2 Features

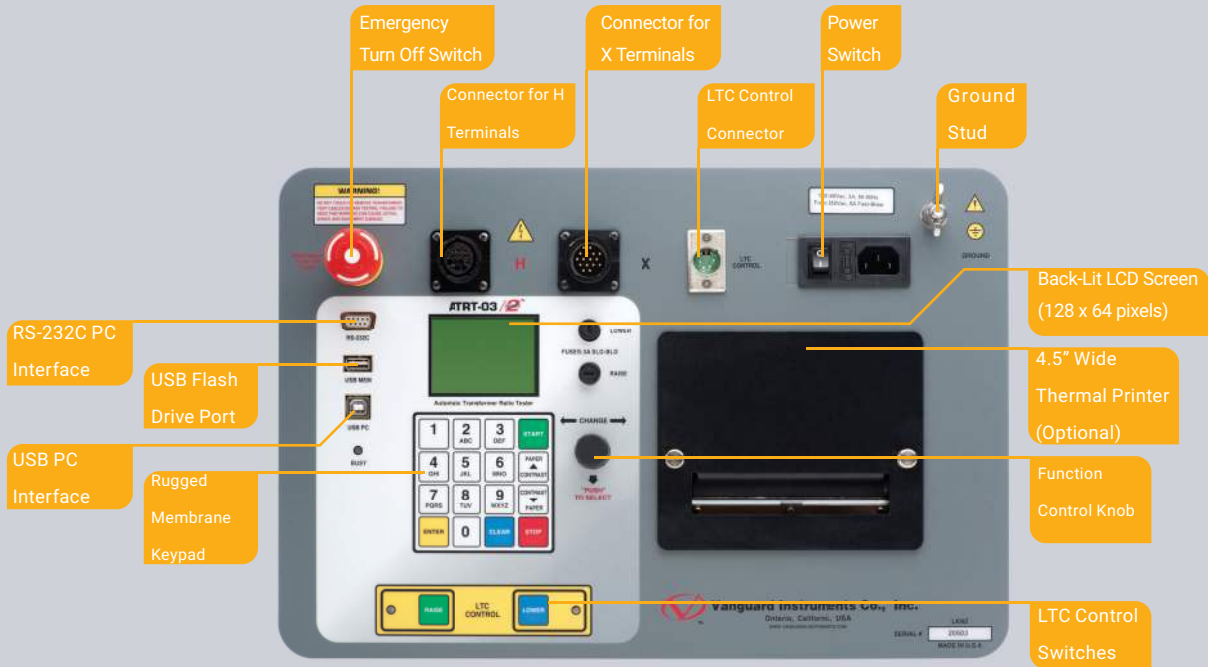

Transformer Test Plans

The ATRT-03 S2 can store up to 128 transformer test plans in its Flash EEPROM. A test-plan is comprised of the transformer nameplate voltages for each tap setting. The calculated turns-ratio based on the name plate voltages is compared with the measured turns-ratio to derive the percentage error and Pass/Fail results. By using a test plan, a transformer can be quickly tested and turns-ratio Pass/Fail reports can be reviewed. Test plans can be created with the PC software and can be transferred to the ATRT-03 S2 via the available interfaces (RS-232C port, USB port, USB Flash drive port).

User Interface


The ATRT-03 S2 features a back lit LCD screen (128 x 64 pixels) that is viewable in both bright sunlight and low-light levels. The test results screen displayed the transformer turns-ratio, excitation current, phase angle, and percentage error. The unit is controlled via a rugged, 16-key, membrane keypad and a digital rotary switch.

Transformer Load Tap Changer Control

Voltage regulator or LTC tap positions can be changed remotely using the unit's built-in transformer load tap changer. This feature eliminates the need to manually raise or lower tap positions from the transformer control panel.

Built-In Thermal Printer Option

The ATRT-03 S2 can be outfitted with an optional built-in 4.5" wide thermal printer that can be used to print test results.

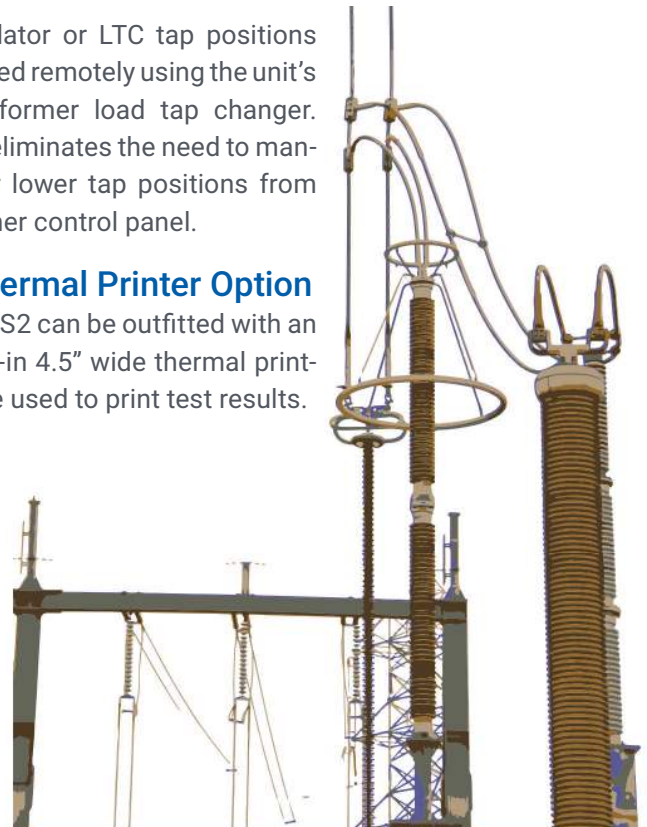

ATRT-03 S2

Automatic, 3-Phase Transformer Turns Ratio Tester

Computer Interface


In computer-controlled mode, the unit can be controlled via the RS-232C or USB interface using the including TTRA S2 transformer analysis software. This Windows®-based application can be used to run tests and to store test results on a PC. Test results can also be exported to Excel, PDF, and XML formats for further analysis.

USB Flash Drive Interface

A built-in USB Flash drive interface provides a convenient method for transferring test plans and test records to or from a USB Flash drive. The user can store up to 999 transformer test plans and test records on a USB Flash drive, and the supplied PC software can be used to view the test records.

TYPICAL 3-PHASE TEST RESULTS SCREEN

Measured Ratio for Phase A, B, and C Excitation Current Reading Percentage Error

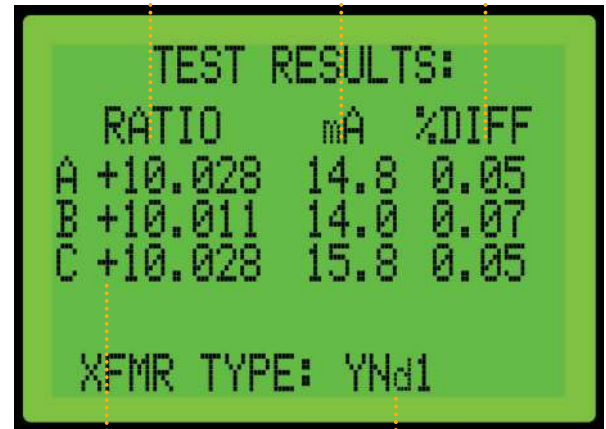


Winding Polarity

Transformer Type


DESKTOP PRINTER OUTPUT

Test reports can be generated with the included TTRA S2 PC software. Test records can be exported to Excel, PDF, and XML formats for further analysis.

 Vanguard Instruments Company, Inc. 1520 S. Hellman Avenue, Ontario, CA 91761, USA Phone: 909.923.9390 FAX: 909.923.9391 www.vanguard-instruments.com									
Filename: test001.txt Date: January 26, 2015 Time: 04:02 PM Page (1/1)									
Company: VANGUARD Location: LAB Circuit: 03 TRANSFORMER TAPS Operator: Comment:									
MFR: GE Device: Transformer Type: Dyn1 Model: DIS TRANS Rating: 500 Serial #: F509443 Max Deviation %: 3 Test Voltage: 40V									
									
TEST	H VOLT	H TAP	X VOLT	X TAP	C-RATIO	M-RATIO	DEV (%)	PF	RES
1	12000		208		96.9250	A: +99.996 B: +100.042 C: +100.043	0.07 0.12 0.12	P P P	2.600 3.100 3.200

THERMAL PRINTER OUTPUT (PRINTER OPTIONAL)


With the built-in thermal printer option (part no. 9003-PR), test results can be quickly printed in the field without the need to connect the unit to a PC.

RECORD NUMBER 1	
TRANSFORMER TEST RESULTS	
DATE: 01/26/15	TIME: 14:29:53
COMPANY: VANGUARD	STATION: LAB
CIRCUIT: DY TRANSFORMER TAPS	MFR: GE
MODEL: DIS TRANS	S/N: F509443
KVA RTG: 500	OPERATOR: VI
TEST VOLTAGE = 40 V, 60 Hz	
TYPE: Dyn1	
	
H TAP: _____	H VOLTAGE: 12,000
X TAP: _____	X VOLTAGE: 208
CALCULATED RATIO: 99.925	
PHS M-RATIO	mA PHASE %DIFF
A +99.996	2.6 0.05 0.07
B +100.04	2.1 0.06 0.12
C +100.04	2.2 0.06 0.12








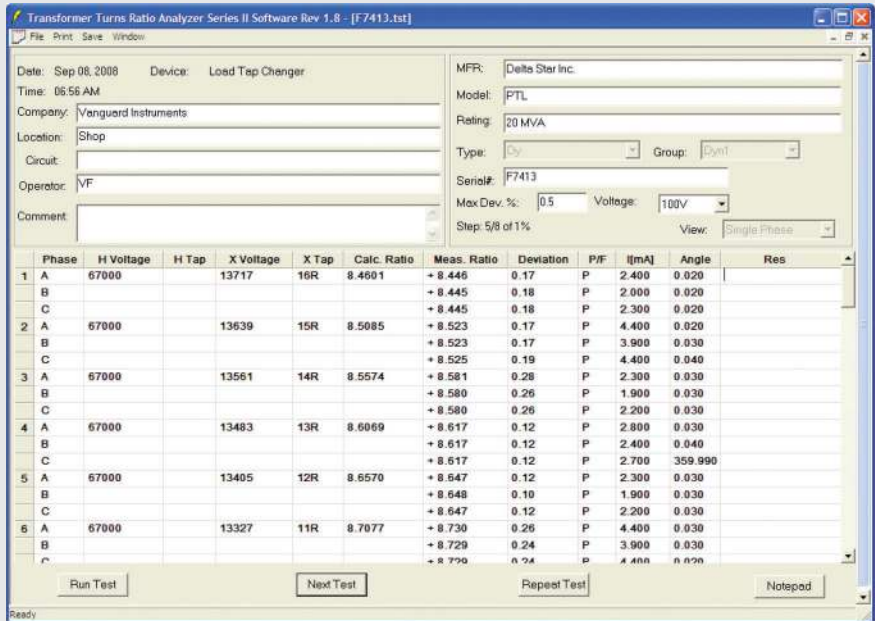















TTRA S2 Software

The ATRT-03 S2 comes with the Vanguard Transformer Turns Ratio Analysis Series 2 (TTRA S2) PC software. The TTRA S2 software can be used to test winding turns ratios of transformers, voltage regulators, and load-tap changers. Test plans can be created using the TTRA S2 application and then transferred to the ATRT-03 S2. Test records can be exported to Excel, PDF, and XML formats for further analysis.

The latest version of the TTRA S2 software can always be downloaded free from the Vanguard web site at www.vanguard-instruments.com. Please note that you will need to create a free account on our site in order to download software or firmware.



ATRT-03 S2 Technical Specifications

	Physical Specifications	Dimensions: 18"W x 7"H x 15" D (45.7 cm x 17.8 cm x 38.1 cm) Weight: 20 lbs. (9.0 Kg)		Input Power	100 ~ 240 Vac, 50/60 Hz
	Measuring Method	ANSI/IEEE C57.12.90		Ratio Measuring Range	0.8 ~ 15,000 : 1
	Typical Turns-Ratio Accuracy	8 Vac: 0.8 ~ 1,000 (±0.08%), 1,001 ~ 4,000 (±0.1%), 4,001 ~ 15,000 (±0.25%) 40 Vac: 0.8 ~ 1,000 (±0.05%), 1,001 ~ 4,000 (±0.1%), 4,001 ~ 15,000 (±0.2%) 100 Vac: 0.8 ~ 1,000 (±0.05%), 1,001 ~ 4,000 (±0.1%), 4,001 ~ 15,000 (±0.2%)			
	Test Voltages	8 Vac @ 1.0A, 40 Vac @ 0.2A, 100 Vac @ 0.1A		Current Reading Range	0 ~ 1 Ampere, accuracy: ±0.1mA, ±2% of reading (±1 mA)
	Display	Back-lit LCD screen (128 x 64 pixels) Viewable in bright sunlight and low-light levels		Phase Angle Measurement	0 ~ 360 degrees accuracy: ±0.2 degree (±1 digit)
	Printer	Optional built-in 4K" wide thermal printer		Computer Interfaces	One RS-232C port, one USB port
	PC Software	Windows®-based transformer turns-ratio analysis software is included with purchase		Internal Test Plan Storage	Stores up to 128 transformer test plans; Plans can be transferred to PC.
	Internal Test Record Storage	Stores 112 complete transformer test records, each record holding the test record header and up to 99 readings		External Data Storage	Up to 999 test records on external USB flash drive (drive not included)
	Safety	Designed to meet IEC 61010 (1995), UL 61010A-1, and CSA-C22.2 standards		Humidity	90% RH @ 40°C (104°F) Non-condensing
	Temperature	Operating: -10°C to +50°C (+15°F to +122°F) Storage: -30°C to +70°C (-22°F to +158°F)		Altitude	2,000 m (6,562 ft) to full safety specifications
	Cables	One 15 ft (4.6m) single phase set, one 15 ft (4.6m) 3-phase set, one 25 ft (7.6m) extension set, one safety ground, one RS-232C, one USB, cable bag		Itc Contact	240 Vac, 2A
	Options	Shipping case, 30' (9.14 m) 3-phase H and X leads, 30' (9.14 m) single phase H and X leads		Warranty	One year on parts and labor

NOTE : the above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.



Doble Engineering

Worldwide Headquarters
123 Felton Street, Marlborough, MA 01752
USA tel +1 617 926 4900 | fax +1 617 926 0528

Specifications are subject to change without notice. Doble is an ISO 9001 & ISO/IEC 17025 & 17034 Certified Company. Doble is an ESCO Technologies Company. PUBLISHED: AUGUST, 2025

www.doble.com